



ProArmor® Synthetic Roof Underlayment

With Slip-Resistant Fusion Back Coating Technology™



SEAL.

PROTECTS AGAINST
WATER INFILTRATION



TOTAL PROTECTION. TOTAL CONFIDENCE.™



SEAL.



DEFEND.



BREATHE.



Choose the synthetic strength of ProArmor® Underlayment.

As a contractor, you know that a roof is only as strong as its weakest component. So why would you risk your reputation on #15 organic felt? Owens Corning® ProArmor® Synthetic Roof Underlayment with **Fusion Back Coating Technology™** is strong, durable and repels water unlike #15 felt. It's also lighter, easier to install and contributes to safe working conditions for your crew.



ProArmor® Underlayment outperforms conventional #15 organic felt — the reason to switch is clear.

Performance Feature	ProArmor® Underlayment	Conventional #15 Organic Felt
Moisture resistance	✓ Repels and sheds water	Absorbs water
Enhanced slip resistance	✓ Features slip-resistant Fusion Back Coating Technology™	None
Enhanced tear resistance	✓ Resists tearing when walked on or in high winds	May tear during installation which can cause leaks
Easy-to-install wide rolls	✓ 42 in.	36 in.
Lightweight	✓ 2.3 lbs. per square ††	11.5 lbs. per square
More coverage per roll	✓ 9.29 squares per roll (with 3-in. overlap)	4.08 squares per roll (with 2-in. overlap)
More material per roll	✓ 10 squares per roll	4.32 square per roll
Longer UV exposure	✓ Can be left exposed for up to 30 days†	Must be covered immediately
Helpful fastening guides	✓ Clearly marked	None
Warranty coverage	✓ 10-Year Limited Warranty*	None

ProArmor® Synthetic Roof Underlayment is a component of the Owens Corning® Total Protection Roofing System.**

Strong for the roof. Safe for your crew. ProArmor® Underlayment with Fusion Back Coating Technology.™

When it comes to doing a job right, few things are as important as reliable product performance and the safety of your crew. Our exclusive **Fusion Back Coating Technology**™ practically eliminates the underlayment from sliding against the roof deck. The result? A stable walking surface and minimal tearing around fasteners that could lead to water infiltration.




Dual-surface slip resistance

Fusion Back Coating Technology™ paired with a non-woven surface provides excellent walking conditions during shingle application even on steeply pitched roofs.



Installs quickly and easily

ProArmor® Underlayment comes in 42 inch lightweight rolls for easy installation.

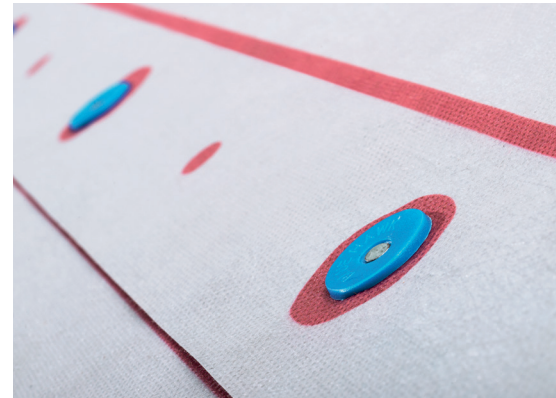

Resists stretching and tearing

ProArmor® Underlayment resists stretching and tearing around fasteners.



Repels moisture

ProArmor® Underlayment provides protection against water infiltration.

ProArmor® Underlayment by Owens Corning, the most trusted roofing brand.^^

ProArmor® Underlayment is designed to deliver the quality and performance you expect from Owens Corning® Roofing, which is why we have a 10-year limited warranty.* Plus, ProArmor® Underlayment is a qualifying accessory for our extended system limited warranties.*

PRODUCT ATTRIBUTES

Warranty Length	10-Year Limited*
Application	For use under asphalt shingles only

TYPICAL VALUES

Length per Roll	286 ft.
Width per Roll	42 in.
Nominal Weight per Roll**	25 lbs.
Coverage (with 3-in. overlap)	929 sq. ft.
Exposed Color	Light gray
Surface Construction	Non-woven

APPLICABLE STANDARDS AND CODES

ASTM D226
ASTM D4869
ASTM E108/UL 790 (Class A Fire Resistance)‡
Florida Product Approval
ICC-ES AC188
Miami-Dade Product Approval (pending)‡‡

TOTAL PROTECTION SIMPLIFIED™



It takes more than just shingles to protect your home. It takes

an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside. The Owens Corning® Total Protection Roofing System® gives you the assurance that all of your Owens Corning® roofing components are working together to help increase the performance of your roof — and to enhance the comfort and enjoyment of those who live beneath it.



SEAL.

HELPS CREATE A WATER-PROOF BARRIER

Ice & Water Barrier
Synthetic Underlayment



DEFEND.

HELPS PROTECT AGAINST NATURE'S ELEMENTS

Starter Shingles
Shingles
Hip & Ridge Shingles




BREATHE.

FOR BALANCED ATTIC VENTILATION

Intake Vents
Exhaust Vents

+ COMFORT.

Add comfort and energy performance with proper attic insulation.

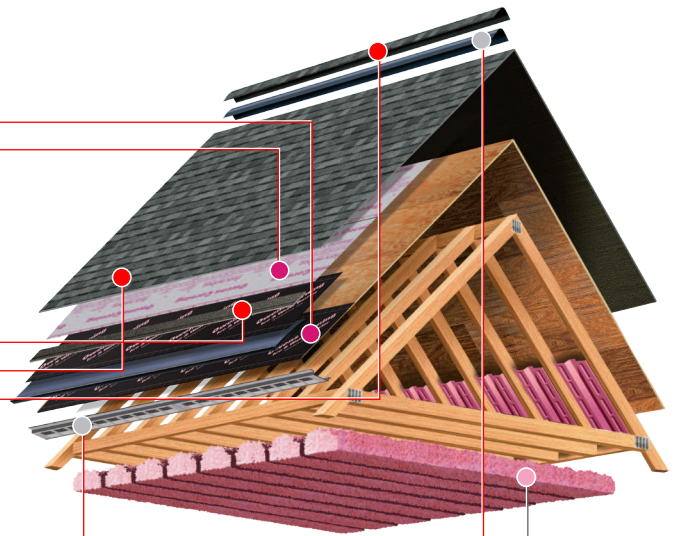

OWENS CORNING ROOFING AND ASPHALT, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659
1-800-GET-PINK®
www.owenscorning.com/roofing

Pub. No. 10019655-E, Printed in U.S.A. April 2017.
THE PINK PANTHER™ & © 1964–2017 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.
© 2017 Owens Corning. All Rights Reserved.

(All)

* See actual warranty for complete details, limitations and requirements. A longer limited warranty term applies when ProArmor® Underlayment is used in conjunction with Owens Corning® Roofing Shingles.

† Special application required for extended exposure. See installation instructions.

** Includes core weight.

†† Excluding core weight.

‡ Underlayment is tested as part of a roof assembly that includes wood decking, underlayment and asphalt shingles.

‡‡ Applies for all areas that recognize Miami-Dade Product Control Section.

^ Excludes non-Owens Corning® roofing products such as flashing, fasteners and wood decking.

^^ 2016 Roofing Homeowner Brand Awareness Survey by Owens Corning Roofing and Asphalt, LLC.